Technical Specifications

HP Series 5 Pro 23.8" FHD Monitor - 524pf




Front

1. Power Button

2. Power LED

Technical Specifications

HP Series 5 Pro 23.8" FHD Monitor - 524pf

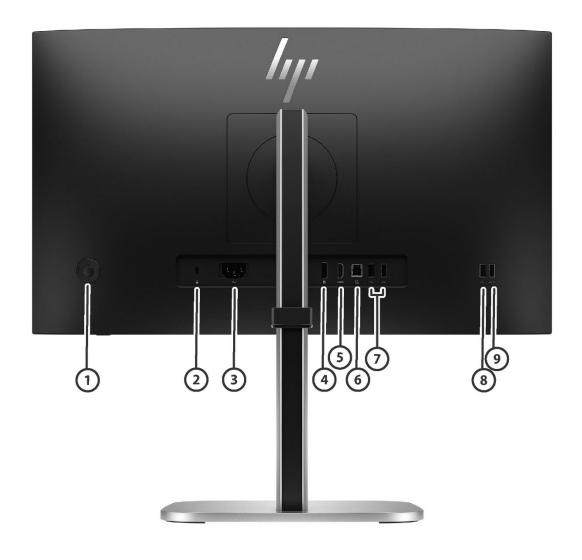

- 1. Joypad OSD button
- 2. Security Cable Slot
- 3. Power Connector
- **4.** DisplayPort[™] 1.2
- 5. HDMI 1.4 Port

Back

- 6. USB-B port
- 7. 2x SuperSpeed USB Type-A 5Gbps signaling rate
- **8.** SuperSpeed USB Type-A 5Gbps signaling rate
- **9.** SuperSpeed USB Type-A 5Gbps signaling rate (charging)

Technical Specifications

Model: 9D9L6UT

Panel SpecificationsDisplay Size (Diagonal)60.5 cm (23.8")Viewable Diagonal Size60.47 cm (23.8")

Panel Technology IPS
Curvature Flat
Max Refresh Rate 100 Hz

Native ResolutionFHD (1920 x 1080)Panel Bit Depth8 bit (6 bit + FRC)

Aspect Ratio16:9Brightness (Typical)350 nitsDisplay Contrast Ratio (Static)1500:1

Display Contrast Ratio (Dynamic) 10000000:1 = 10M:1

Flicker Free Yes

Pixel Pitch 0.2745 x 0.2745 mm

Pixels Per Inch (PPI) 93 PPI

Display ColorsUp to 16.7 million colors supported
*Number of colors through A-FRC technology.

Backlight Lamp Life Minimum (To Half

Brightness - In Hours) 30,000 hours

Backlight Type Edge-lit, WLED
Screen Treatment Anti-glare
Hardness 3H
Haze 25%

Response Time (Typical) 5ms GtG (with overdrive)

Horizontal Viewing Angle

(Typical Cr>10)
Vertical Viewing Angle (Typical Cr>10) 178°

Panel Active Area Metric (W X H) 52.70 x 29.65 cm

Panel Active Area Imperial (W X H) 20.75x11.67 in

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

178°

Color sRGB 100%

Color Management Color Space RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2

RGB Channel Adjust Yes, Gain

Default Color Temperature Neutral (6500K)

 Monitor Specifications
 Bezel Type
 3-sided borderless

Color Of Stand Black and Silver

Color Of HeadBlackTilt-5 to +23°Swivel±45°Pivot±90Height Adjust Range150 mm

Vesa Mounting100mm x 100mmSecurity LockSecurity lock-ready



Technical Specifications

Detachable Stand Yes

Warranty 3/3/0 for AMS, EMEA, APJ (3/3/3 in select APJ countries)

Low Blue LightYes, HP Eye Ease (TÜV Low Blue Light Hardware Solution

certified)

Zero Bright Dot Guarantee No*

*The HP Pixel Policy allows no bright sub-pixel defects for this display. For complete details, see http://support.hp.com/us-

en/document/c00288895.

Management Software

HP Client Management Script Library*,

HP Display Center**

*The Client Management Script Library must be downloaded to the connected PC to run CMSL commands. Some limitations may apply to legacy displays. Visit support.hp.com to download **Host PC requires Windows 10 and above. HP Display Center is

available on the Microsoft store.

On Screen Display (OSD)

On Screen Display Brightness+, Color, Input, Image, Power, Menu,

Management, Information, Exit

Native Resolution FHD (1920 x 1080)

Maximum Resolution FHD (1920 x 1080 @ 100 Hz)

Preset Graphic Modes/Supported

Resolutions 640 x 480 @ 75Hz

720 x 400 @ 70 Hz 720 x 480 @ 60Hz 720 x 576 @ 50Hz 800 x 600 @ 60 Hz 800 x 600 @ 75 Hz

640 x 480 @ 60Hz

1024 x 768 @ 60 Hz 1024 x 768 @ 75 Hz 1280 x 720 @ 50 Hz 1280 x 720 @ 60 Hz

1280 x 720 @100 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz

1280 x 1024 @ 75 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x1080 @ 50Hz

1920 x 1080 @ 60 Hz 1920 x 1080 @ 75 Hz

1920 x 1080@ 100 Hz

Minimum Vertical Scan Rate50 HzMaximum Vertical Scan Rate100 HzMinimum Horizontal Scan Rate30 kHzMaximum Horizontal Scan Rate120 kHzMaximum Pixel Clock300 MHzUser Programmable ModesYes, 18

Technical Specifications

User-Assignable Function Buttons Yes, 4 (6 options)

Languages 11 (English, Spanish, German, French, Italian,

Netherlands, Portuguese, Japanese, T-Chinese, S-Chinese

and Russian)

Connector Types DisplayPort™ 1 DisplayPort™ 1.2

HDMI 1 HDMI 1.4

HDCP Yes, DisplayPort™ and HDMI

USB-Type-A4 SuperSpeed USB Type-A 5Gbps signaling rate (1

USB-B (Hub enablement) charging)
1 USB-B

Special Features Switch Monitor Power button

Next Active Input / Up button Information / Down button Brightness / Left button Color / Right button Menu / Enter button

User Presets 18

User Updateable Firmware Yes

Power & Operating Power Supply Internal

Power Source 100 – 240 VAC 50/60 Hz

Power Consumption- Max58 WEnergy Saving/Stand By Mode0.5 WPower Consumption - Typical22 W

Energy Star Data Operational Mode at 100 VAC 11.6 W

Operational Mode at 115 VAC 11.5 W **Operational Mode at 230 VAC** 12.7 W

EU Energy Efficiency On-mode Power Consumption for Class (ErP LOT-5) Standard Dynamic Range (SDR)

ErP LOT5 Energy Efficiency Class for Standard Dynamic Range (SDR)

A C

Operating Conditions Operating Temperature - Celsius 5~35°C

Operating Temperature - Fahrenheit 41 – 95°F Non-Operating Temperature - Celsius –40 – 65°C Non-Operating Temperature -

Fahrenheit -4 – 149°F

Operating Humidity 20 – 80% Relative Humidity (non-condensing)

Non-Operating Humidity5~95%RHOperating Altitude Metric0~5,000mNon-operating Altitude Metric0~12,192mOperating Altitude Imperial0~16,400ftNon-operating Altitude Imperial0~40,000ft

Certifications and Low Halogen Yes*

Specs

Technical Specifications

Compliances

* External power supplies, WWAN modules, power cords, cables and peripherals excluded. Service parts obtained after purchase may not be Low Halogen.

Agency Approvals and Certifications

WW application

CB/KC/NOM/TUV-S/ISO 9241-

307/EAC/cTUVus/PSB/ISC/CCC/CECP/SEPA/TCO/TCO

Certified Edge/GS/TUV HW

LBL/UAE/Ukraine/BIS/NRCS/CE/FCC/VCCI/BSMI/EMF/KCC/I CES/RCM/Australian-New Zealand DoC/Energy Star/Korea MEPS/Ukraine EE/CEL/California CEC/WEEE/PSE/TGM Windows 11 (x64 only), Windows 10 (x64 only)

Microsoft WHQL Certification ENERGY STAR® Certified EPEAT® Registered

Regions need to verify by country

Yes

EPEAT® Gold in United States*
EPEAT® registered with Climate+

*EPEAT® Gold

NOTE: Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit

www.epeat.net for more information.

China Energy Label TCO Certified Edge TCO Certified CEL Grade 2

Yes Yes

SmartWay Transport Partnership - NA

only

Yes (NA sku)

Contains Recycled Materials

Recycled Plastics

85% ITE-derived closed loop plastic*

Contains Ocean-Bound Plastic**

*Recycled plastic content percentage is based on the definition

set in the IEEE 1680.1-2018 standard

** All plastic parts contain ocean-bound plastic. Percentage of ocean-bound plastic contained in each component varies by

product.

Recycled Metal At least 30% recycled metal*

* Recycled metal is expressed as a percentage of the total weight of the metal according to ISO 14021 definitions for metal

parts over 25 grams.

Recycled Glass 20% recycled glass*

* Percentage of recycled glass in the monitor panel varies by product. Recycled glass is expressed as a percentage of the total

weight of the glass.

Recyclable Packaging (Box, packing

materials)

Outside Box and corrugated cushions are 100%

sustainably sourced and recyclable* & Molded Paper Pulp Cushion inside box is 100% sustainably sourced and

recvclable**

*100% outer box packaging and corrugated cushions made from

sustainably sourced certified and recycled fibers.

Technical Specifications

**Molded pulp cushions contains 100% recycled wood fiber and organic materials.

		<u>Metric</u>	<u>Imperial</u>
Unit Product/Package	Product Dimensions	53.94 x 18.95 x 50.32 cm	21.24 x 7.46 x 19.81 in
_		33.94 X 16.93 X 30.32 CIII	21.24 x 7.40 x 15.61 III
Specifications	(Unpacked with stand) (W x D x H)	63.1 11.0 20.3	24.45 5.54 4.5.47
	Product Dimensions	62.1 x 14.0 x 39.3 cm	24.45 x 5.51 x 15.47 in
	(Packed) (W x D x H)		
	Display Head Dimensions	53.94 x 4.72 x 31.43 cm	21.24 x 1.86 x 12.37 in
	(Unpacked without stand) (W \times D \times H)		
	Base Area Footprint	242 x 189.50 mm	9.53 x 7.46 in
	(w x d mm)		
	Bezel Measurements	Top: NA	Top: NA
		Sides: NA	Sides: NA
		Bottom: 9.25	Bottom: 0.37
	Product Weight	4.9 kg	10.8 lb
	(Unpacked with stand)		
	Product Weight	7.2 kg	15.9 lb
	(Packed)		
	Product Weight	3.4 kg	7.6 lbs
	(Head Only)		
Pallet Information	Pallet Dimensions	Slip Sheet: 1128 x 629 x	Slip Sheet: 44.41 x 24.76 x
	(L x W x H mm)	1978 mm (20' ft & 40' ft)	77.87 inch (20' ft & 40' ft)
		Slip Sheet: 1128 x 629 x	Slip Sheet: 44.41 x 24.76 x
		2372 mm (40' HQ)	93.39 inch (40' HQ)
		Pallet: 1128 x 629 x 2106	Pallet: 44.41 x 24.76 x
		mm (20' ft & 40' ft)	82.91 inch (20' ft & 40' ft)
		Pallet: 1128 x 629 x 2499	Pallet: 44.41 x 24.76 x
	Delles Tatal Maichs	mm (40' HQ)	98.39 inch (40' HQ)
	Pallet Total Weight	Slip Sheet: 292.5 kg (20' ft & 40' ft)	Slip Sheet: 644.8 lbs (20' ft & 40' ft)
		Slip Sheet: 350.6 kg (40	Slip Sheet: 772.9 lbs (40'
		HQ)	HQ)
		Pallet: 302.5 kg (20' ft & 40'	Pallet: 666.9 lbs (20' ft &
		ft)	40' ft)
		Pallet: 360.6 kg (40 HQ)	Pallet: 795.0 lbs (40' HQ)
	Pallet Layers	Slip Sheet: 5 layers (20' ft & 4	0' ft)
		Slip Sheet: 6 layers (40' HQ)	
		Pallet: 5 layers (20' ft & 40' ft)	
		Pallet: 6 layers (40' HQ)	
	Pallet Product per Layer	8 per layer (slip sheet)	
		8 per layer (pallet) Slip Sheet: 40 sets (20' ft & 40	n' f+\
		Slip Sheet: 48 sets (40' HQ)) IL)
	Total Products per Pallet	Pallet: 40 sets (20' ft & 40' ft)	
		Pallet: 48 sets (40' HQ)	
	Container Load, 20-Foot	720 sets (slip sheet)	
	CUIICAINET LUAU, 20-F00T	720 sets (pallet)	
	Container Load, 40-Foot	1520 sets (slip sheet)	
		1520 sets (pallet)	

Technical Specifications

Container Load, 40-Foot HighQ

1824 sets (slip sheet) 1824 sets (pallet)

What's in the box?

AC power cord (1.83m) 5.9ft HDMI 1.4 cable (1.8m) 5.9 ft USB 3.0 B-A cable (1.8m) DisplayPort™ 1.2 cable (1.8m)

Warranty

Quick Setup Poster

User Guide and Warranty Languages **User Guide Languages**

Warranty Languages

Arabic, Bahasa Indonesia, Bulgarian, Chinese-S, Chinese-T, Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Kazakh, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese (Brazilian), Portuguese (Iberian), Romanian, Russian, Serbian, Slovak, Slovenian, Spanish, Swedish, Thai, Turkey, Ukrainian English US (EN), English AP (EN-AP), English LA (EN-LA), English UK (EN-GB), Arabic (AR) -17x, Bahasa Indonesia (ID), Bosnian (BS), Bulgarian (BG), Chinese-S (CN), Chinese-T (TW), Croatian (HR), Czech (CS), Danish (DA), Dutch (NL), Estonian (ET), Finnish (FI), French Canadian (FC), French European (FR), German (DE), Greek (EL), Hebrew (HE), Hungarian (HU), Italian (IT), Japanese (JA), Kazakh (KK), Korean (KO), Latvian (LV), Lithuanian (LT), Norwegian (NO), Polish (PL), Portuguese, Brazilian (BR), Portuguese, Iberian (PT), Romanian (RO), Russian (RU), Serbian (SR), Slovak (SK), Slovenian (SL), Spanish, Castilian (ES-ES), Spanish, Latin America (ES-MX), Swedish (SV), Thai (TH)

Turkish (TR), Ukrainian (UK), Vietnamese (VI)

Technical Specifications

© Copyright 2024 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log				
November 22, 2024	V1 to V2	Updated	Management Software Section	
		Added	Certification Section	
	V2 to V3			
	V3 to V4			

